



GUSO CONNECTOR

Connecting ring for flexible duct

Use

Is used in duct and ventilation-duct system to connect flexible ducts to the duct system or the other air-technical fittings.


Characteristics

Melting point 147 °C.

Available dimensions and sizes

model	A	B	C	D	d	kg
100	10	15	25	100	100	0.13
125	10	15	25	125	125	0.15
150	10	15	25	150	150	0.18
160	10	15	25	160	160	0.19
200	10	15	25	200	200	0.21
250	10	15	25	250	250	0.23

Dimensions

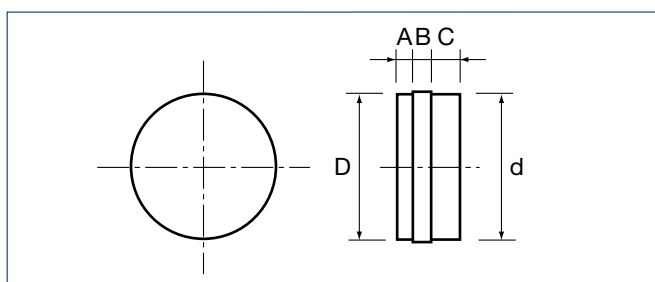

Version

Made of a heterophase ethylene copolymer PP 7064 L1. This product achieves a good balance between rigidity and strength and contains elements to prevent static electricity.

Prices are available on request.